



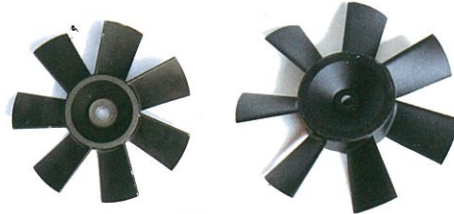

8" ,10" ,12"  
(PORTABLE)




( SPV-Blade )


## PERFORMANCE DATA

Model	Blade IN.(mm)	Voltage (V)	Frequency (Hz)	Phase	Power (W)	Flow Rate CMH(m <sup>3</sup> /hr)	Static Pressure (Pa)	Weight set (Kg)
SPV-8	8" (200)	230	50/60	1	230	1500	245	7.80
SPV-10	10" (250)	230	50/60	1	320	2500	294	8.80
SPV-12	12" (300)	230	50/60	1	520	3600	373	11.50
SPV-12	12" (300)	110	60	1	520	3900	373	11.50



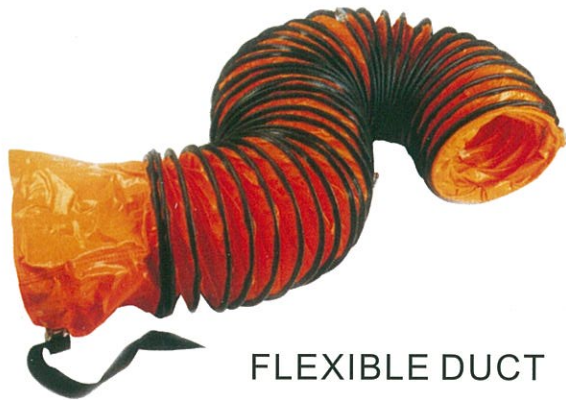

FLEXIBLE DUCT

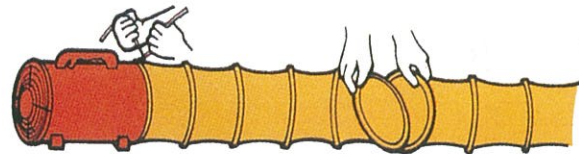

CONNECTION FLEXIBLE DUCT

Model	Diameter	Length(metre)
Duct-200	8"	5m
Duct-250	10"	5m
Duct-300	12"	5/10m
Duct-400	16"	5/10m

## TN SERIES ADJUSTABLE ALUMINIUM VANE AXIAL BLOWER

the adjustable aluminium vane axial ventilator has the high efficient ventilation capacity of the domestic advanced level at present and it has enough static pressure under the large flow operation which overcomes the shortcoming that the larger the air flow of the fan is ,the lower the static pressure is .This series product has beautiful appearance,compact and firm overall installation structure and the moveable support is classified into tube type or flow type.

### TN 系列可调铝叶轴流风机

可调铝叶轴流通风机是具有当前国内先进水平的产品，高效率的通风能力，在大流量使用时具有足够的静压力，克服了以往风机流量越大静压越低的缺点。本系列产品外型美观，整体安装结构紧凑、牢固，活动支架可分体为管道式或座地式。



## PERFORMANCE DATA

16" 、 20" 、 24"

Model	Blade IN.(mm)	Voltage (V)	Phase	Power (KW)	RPM (r/min)	Flow Rate CMH(m <sup>3</sup> /hr)	Static Pressure (Pa)	Noise dB(A)	Weight set (Kg)
TN-40	16" (400)	415	3	1.5	2800	8200	430	78	33
TN-50	20" (500)	415	3	2.2	2800	9000	480	80	46
TN-60	24" (600)	415	3	7.5	2800	26200	402	86	80
TN-60a	24" (600)	415	3	3	1400	14000	310	83	80